

Get ramps right

with our famous ramp specifier guide

1 What type?

Steps/Stairs

Wood/Level Access Door Threshold

PVC Door Threshold

Vehicle Access

















2 How steep?


1:6 (10°)*	⊢ 6 x Height →	Acceptable in some cases for short threshold ramps.
1:8 (8°)*		A useful balance between gradient and space suitable for portable ramps in some assisted applications and events etc.
1:12 (5°)	├── 12 x Height ──	Often required by social services/local authorities. Minimum required Building Regs Doc M for installed ramps.
1:15 (4°)	I Height	Sometimes required by social services/local authorities for independent access.

3 How long?

a. Measure the step height / level difference. (Total height of steps or height to resting point on vehicle).







Enable Access, Aerolight, ExitMaster, RampCentre & Welcome are registered trademarks of Enable Access. We undertake a policy of continual review and rese which may lead to changes in product appearance and specification. Information is given for guidance only, customers take ultimate responsibility for purchasing decisions. Rollouttrackway, doorline, gripline, rampkit, ultralight, permaramp, connectplatform, utilityramp and swift ramp system are trademarks of Enable Access. These, and all other product names and codes, must only be used in reference to products supplied by Enable Access. All dimensions, weights and conversions are approximate for your easy reference only and specific risk assessments (including all manual handling assessment issues) should be carried out prior to the use of the equipment supplied. Stated capacities apply for combined weight of mobility devices and/or passenger/attendant. For technical help and details of your nearest stockist phone 020 8275 0375.

3 continued

b. Use the Ramp Length Guide (below) to decide which length you need.

Step height/level difference (up to)	Length at 1:6	Length at 1:8	Length at 1:12
10cm (4")	60cm (2')	80cm (2' 8")	120cm (4')
15cm (6")	90cm (3')	120cm (4')	180cm (6')
20cm (8")	120cm (4')	160cm (5' 4")	240cm (8')
25cm (10")	150cm (5')	200cm (6' 8")	300cm (10')
30cm (1')	180cm (6')	240cm (8')	360cm (12')
45cm (1' 6")	270cm (9')	360cm (12')	540cm (18')
60cm (2')	360cm (12')	480cm (16')	720cm (24')

Note: Ramp lengths over 300cm (9'10") can be achieved using high-rise ramp kits and Welcome® Ramp System.

4 Select product height & type



or select by product type...

or coloct by product type		
Full Width Portable Ramps & Combination Kits Great for all types of mobility device, including 3 wheel scooters. Easy to walk on, with full width grip surface	4	
Channel Ramps Great for narrow doorways. Separate halves allow very compact storage and lighter carrying	7	
Threshold Ramps Simple to deploy. Can be used for either one or both sides of a door	8	
Relocatable Ramps Great for semi-permanent access. Easy to re-deploy elsewhere	10	
Modular Ramp & Half Step Systems Quick to fit & easy to remove or modify when needs change. Perfect for independent access	12	


Then turn to the product page and select the ramp you need.

aerolight® by rampCENTRE®



Full width, high capacity, lightweight ramps

Your benefits:








compact storage features





aerolight-xtra™

Proven & popular for building access

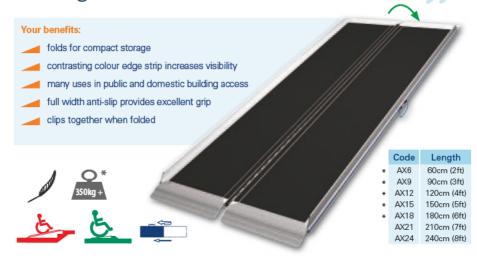

aerolight-classic™

Excellent value with great features



aerolight-lifes

Easy use vehicle & building access ramp







350kg +

Length

150cm (5ft)

180cm (6ft)

210cm (7ft)

240cm (8ft)

Code

AB15

AB18

AB21

AB24

rollouttrackway

Cover grass, gravel and other uneven surfaces for access with this incredibly hard wearing product.



Code	Length	Width	Weight
DT4E	450 (4/44%)	00 (0/ 44 %)	kg (lb)
RT15	150cm (4′ 11″)	90cm (2' 11")	12 (26)
RT25	250cm (8' 2")	90cm (2' 11")	20 (44)
RT50	500cm (16' 4")	90cm (2' 11")	40 (88)



events.

(Ramp not included)

*ramp*kit™- high-rise

Achieve lengths of up to 4.8m (16') with lightweight, portable products




	Code	Includes	Total Length	Code	Description
*	HR30	1 x AJ4, 2 x AX15	300cm (10ft)		Joining Support: Includes easy-use
*	HR36	1 x AJ4, 2 x AX18	360cm (12ft)		handle fixings for height adjustment.
	HR42	1 x AJ4, 2 x AX21	420cm (14ft)		Can be used with any aerolight ramp.
	HR48	1 x AJ4, 2 x AX24	480cm (16ft)		can be used with any aerongin famp.

rampkit™- up & over

The complete solution to PVC door thresholds





Code	Includes	External Ramp Length
UO12	1 x DM5, 1 x AX12	120cm (4ft)
UO15	1 x DM5, 1 x AX15	150cm (5ft)
UO18	1 x DM5, 1 x AX18	180cm (6ft)
UO21	1 x DM5, 1 x AX21	210cm (7ft)





Your benefits:

- Compact lightweight channel ramps
- low kerbs and long bevel sides greatly increase clearance for scooters & power chairs
- unique perforated surface and excellent grip design
- generous widths for safety and ease of use
- compact storage features



Max Length

110cm (3'7")

150cm (4'11")

200cm (6'7'







Lenath PR06 55cm (1'10")

Storage bag also available Code: PHB06

ultralight-folding™



ultralight-telescopic™ Adjustable in use & compact to store







length

ultralight-combi™

Straight or up & over a threshold, even PVC





PCW: xtra wide options for larger mobility devices ax Length

Code	M
PC21-3	20
PC28-3	27
PCW21-3	210
PCW28-3	300

7cm (6' 9") 6cm (9' 1") cm (6' 11") cm (9' 10")



Combines both folding

and telescopic features





doorline TM by rampcentre

Your benefits:

Versatile threshold ramps

huge range of sizes to meet almost every threshold requirement

 custom ramps for the few applications our stock products cannot solve

each product has an excellent grip surface



doorline-wedge™







10cm (3.9ins)

doorline-bridge™



DW10








doorline-multi™

Use with any aerolight ramp to overcome PVC doors






7		
	Code	Max Height
	DM5	8cm (3.1ins)
	DM7	12cm (4.7ins)

doorline-neatedge90™

Single door width rubber wedge








	Code	Height
*	DN15-9	1.5cm (0.6ins)
*	DN25-9	2.5cm (1ins)
*	DN50-9	5cm (2ins)
*	DN75-9	7.5cm (3ins)

doorline-neatedge™ Rubber threshold solution for wider doors







World first concept adjustable wedge ramp!





3 sizes for up to 10cm (4")



in less than a minute!







Min Height 2cm (0.8ins) 3.5cm (1.4ins) 6cm (2 4ins)

Max Height 3cm (1.2ins) 5.5cm (2.2ins) 10cm (3.9ins)

doorline-neatslope™

Durable & flexible, compact solution



Height	Self Adhesive Y/N
0.6cm (0.25ins)	N
0.6cm (0.25ins)	Υ
1cm (0.4ins)	N
1cm (0.4ins)	Υ
1.6cm (0.6ins)	N
1.6cm (0.6ins)	Y
	0.6cm (0.25ins) 0.6cm (0.25ins) 1cm (0.4ins) 1cm (0.4ins) 1.6cm (0.6ins)

doorline-custom™

Made to your specifications





















permarampTM by rampcentre®



Leave in place for all types of door threshold

Your benefits:

- eliminates requirement for the ramps to be lifted once in position
- easily adjust and fix down or leave in place for every threshold type
- unique 'gripdeck' surface for sustained outside use
- fixing options at top and bottom for secure location





permaramp - entry flap™







Internal bridging flap for permaramp adjust.



permaramp - super-wide™

- Suited for bariatric use up to 400kg (63 stone) capacity
- Great for scooters, mobility devices, and sports wheelchairs
- PAW is totally self-supporting and adjustable; great for PVC doors



	Code	Length	Capcity kg (st)	Weight kg (st)
*	PAW9	90cm (3ft)	400 (63)	14 (22)
*	PAW12	120cm (4ft)	400 (63)	18 (40)
*	PAW15	150cm (5ft)	400 (63)	22 (48)
*	PAW18	180cm (6ft)	400 (63)	26 (57)
*	PAW21	210cm (7ft)	350 (55)	30 (66)
	PAW24	240cm (8ft)	300 (47)	34 (75)







Attractive & excellent value, straightforward residential access solution









Fast one person install

Small van friendly

100% Modular

Next day delivery

This modular ramp system has been carefully developed to suit your budgets, needs and timescales. It is incredibly good value, extremely versatile and quick to deliver and install.





Accessories available:

Self supporting doorplate

No more cracked PVC



Size cm 80 x 15 100 x 15

Wide/long doorplates

Now available up to 100cm width & 22cm length.



Size cm

80 x 15 100x15 80 x 22 100x22



2 sizes of platform available: Standard platform

120cm (4ft) x 120cm (4ft)

Patio platform 120cm (4ft) x 180cm(6ft)





Steps

Easy access for all users. (Order 2 kits for 2 steps).



Step handrails



Soft ground leg bearer

Stop legs from sinking in soft ground.



Bowend

For extra safety at the ends of handrails



Leg extensions

Increase max system heights from 33cm to 55cm

swift ramp system™

Perfect for higher levels and communal or public applications

Your benefits:

Rise up to 1.5m (5 feet)

Three widths from 90cm (3 feet) to 150cm (5 feet)

Suited for bariatric use













Substantial half steps with handrails






Code	Min Height	Max Height	Weight kg (lbs)
WHSL	7.5cm (3ins)	12.5cm (4.9ins)	10 (22)
WHSXL	7.5cm (3ins)	12.5cm (4.9ins)	12 (26.5)

Half sten accessories

FIX-DOWN FEET

Trail step accessories	
RAILS	(Supplied with 2 fix-down feet)
WHS60	60cm (24ins) wide handrail
WHS75	75cm (29.5ins) wide handrail
WHS90	90cm (35.4ins) wide handrail
KERBS	(Use with rails)
WHK60	60cm (24ins) safety kerb
WHK75	75cm (29.5ins) safety kerb
WHK90	90cm (35.4ins) safety kerb

Adjustable fix-down feet (2pk)

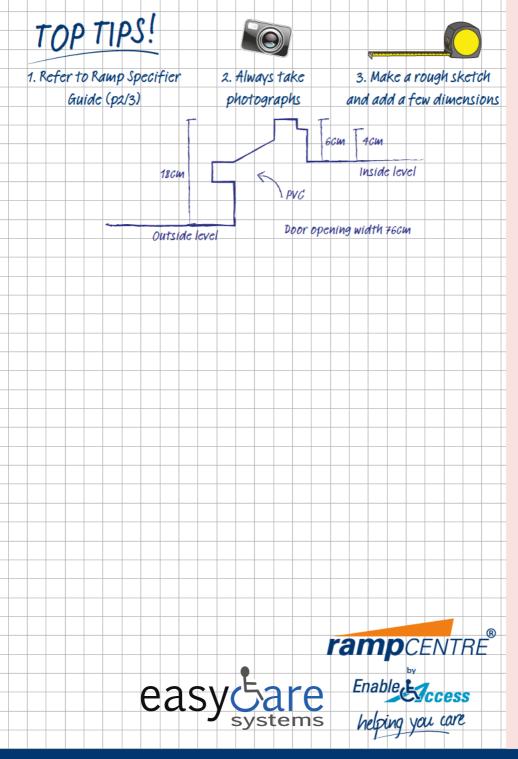





Contact us for product selection advice and stockist information











Units 5 to 6 Lower Vicarage Road, Southampton, Hampshire, SO19 7RJ T: 02380 420678 E: info@easycaresystems.co.uk W: www.easycaresystems.co.uk

